


Made in USA

425146-1  
1 EACH



- Marine Grade Aluminum Panel with 4 Illuminating Switches and 4 Fuse Holders.
- Includes 8 Fuses: (2) 3 Amp, (4) 5 Amp, and (2) 10 Amp.
- Customize with Included Labels.

### ROCKER SWITCH PANEL

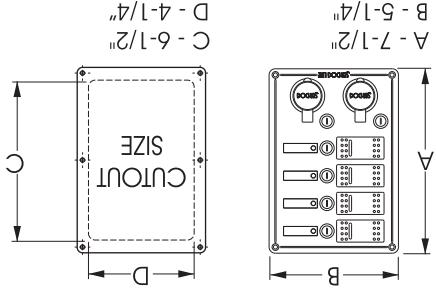

420504-1 Replacement Fuse Holder - Complete  
420211-1 Replacement Rocker Switch

Insert a small screw driver in the slot. Push and turn 90° to left to open the cap.  
Insert a small screw driver in the slot. Push and turn 90° to right to close the cap.



FIG. 2

**SEADOG LINE®**  
Aluminum

425146-1  
1 EACH

## ROCKER SWITCH PANEL W/DUAL POWER SOCKETS

12 VOLT  
10 AMPS MAXIMUM PER CIRCUIT  
30 AMPS MAXIMUM PER PANEL  
4 ILLUMINATING SWITCHES  
O.D.: 7-1/2" x 5-1/4"



### Sea-Dog Aluminum Rocker Switch Panel w/ Dual Power Sockets Model #425146-1 Installation Instructions

1. Connect the positive terminal of the battery (12V only) to the wire identified with a "+" tag.
2. Connect the negative terminal of the battery (or ground) to the wire identified with a "-" tag.
3. Connect the positive wire of each individual circuit to the #1 spade on the corresponding rocker switch on the panel.
4. Connect the remaining wire or negative wire of each circuit to the common ground of the boat, if so equipped, or directly to the negative terminal of the battery or the negative bar of the panel.  
NOTE: Do not attach any additional wires to the remaining terminal on the fuse holder.
5. Your Sea-Dog switch panel is supplied with 8 fuses - (2) 3A, (4) 5A and (2) 10A. (WARNING: Do not use fuse rated over 10A).
6. To remove the fuse holder cap, see figure 2 on opposite side.

