




2012-2013

Clamcleat
Product Line

SEADOG® LINE
QUALITY MARINE GEAR

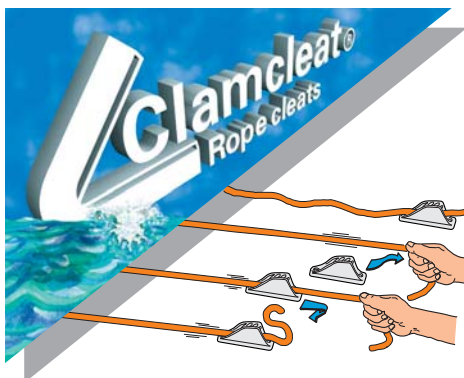

Cleats & Chocks

The Clamcleat® principle

A deceptively simple ridged 'V' groove holds ropes firmly, yet is devoid of any moving parts to break or seize. It allows the immediate release of the rope by a short upward and backward pull.

Complementary ranges to satisfy all needs.

Marine grade nylon cleats offer very good value for money, for both production builder and sailor alike. They are ideal for most applications where high loads or rope surges are not likely to be encountered. Nylon cleats are corrosion resistant and will last for many years outdoors.

Aluminum cleats are available in our standard **silver** or the new **hard anodized** finish. They are unaffected by the heat generated by a rope surging back through a cleat as well as being suitable for sub-zero temperatures.


Hard anodizing has a high-tech and fashionable appearance as well as offering superior resistance to sea water corrosion. Our research into cleat materials over the years has shown aluminum to be far better for high performance cleats than any polymer, irrespective of any fiber reinforcement or additive. These factors make aluminum cleats the best choice for demanding applications.

Standard colors are shown in the photographs but **special colors** are available to order. For example, white 002040 are supplied for window blinds.

Numbers beginning with 00 are Sea-Dog part numbers and should be used when ordering. Numbers beginning with CL are Clamcleat numbers given for reference and marked on the bottom of the cleat. See Numerical Index at the end of Chapter 10.

Most cleats are provided with countersunk fixing holes. Flathead screws or bolts of the recommended size should be used; bolts being preferred. If using rivets with a powered fixing gun, make sure the pressure is not set too high. Fastenings must be entered straight so that the heads do not protrude to snag the rope. Several of the cleats have been designed with a groove in the base enabling them to be fitted to both flat and curved surfaces.

Clamcleat® rope cleats are not suitable for metal ropes.



The AN suffix indicates an extra superior Hard Anodized finish.

Micros & Mini Cleats	Sea-Dog Part #		mm Ø inch Ø	mm inch			mm Ø inch Ø	mm Ø Gauge	Gms Ozs	Standard pack
	Bulk	Display		A	B	C				
Mini										
CL204 (Nylon)	002040	002040-1	3 - 6 1/8-1/4	52 2 1/16	36 1 7/16	17 5/8	M4 #8	4.2 No8	9 0.3	10
Racing Mini										
CL222	002220	002220-1	3 - 6 1/8-1/4	48 1 7/8	36 1 7/16	15 5/8	M4 #8	4.2 No8	16 0.6	10
CL222AN (Aluminum)	002225	002225-1								
Micros										
CL274	002740	002740-1	1 - 4 3/64-3/32	33 1 5/16	24 1 5/16	13 1/2	M3 #4	3.0 No4	3 0.1	10
CL274W (Nylon)	002743	002743-1								
Racing Micros										
CL275	002750	002750-1	1 - 4 3/64-3/32	33 1 5/16	24 1 5/16	13 1/2	M3 #4	3.0 No4	7 0.25	10
CL275AN (Aluminum)	002755	002755-1								
Tapered Pad for CL204 & CL222										
CL802 (Polypropylene)	008020	—	—	57 2 1/4	—	21 1 3/16	M4 #8	4.2 No8	4 0.1	10
Tapered Pad for CL274 & CL275										
CL823 (Polypropylene)	008230	—	—	47 1 13/16	—	19 3/4	M3 #4	3.0 No4	4 0.15	10




Fine Line Cleats	Sea-Dog Part #		mm Ø inch Ø	mm inch			mm Ø inch Ø	mm Ø Gauge	Gms Ozs	Standard pack
	Bulk	Display		A	B	C				
Fine Line (Starboard)										
CL213 (Nylon)	002130	002130-1	2 - 5 1/16-3/16	70 2 3/4	49 1 15/16	21 1 3/16	M4 #8	4.2 No8	9 0.3	10
Fine Line (Port)										
CL214 (Nylon)	002140	002140-1	2 - 5 1/16-3/16	70 2 3/4	49 1 15/16	21 1 3/16	M4 #8	4.2 No8	9 0.3	10
Racing Fine Line (Starboard)										
CL258	002580	002580-1	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 3/16	M4 #8	4.2 No8	19 0.7	10
CL258AN (Aluminum)	002585	002585-1								
Racing Fine Line (Port)										
CL259	002590	002590-1	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 3/16	M4 #8	4.2 No8	19 0.7	10
CL259AN (Aluminum)	002595	002595-1								

008230




Auto-Release Cleat	Sea-Dog Part #		mm Ø inch Ø	mm inch			mm Ø inch Ø	mm Ø Gauge	Gms Ozs	Standard pack
	Bulk	Display		A	B	C				
Auto-Release Racing Mini										
CL257 (Aluminum + Acetal)	002570	002570-1	4 - 6 3/16-1/4	68 2 5/8	36 1 13/32	24 7/8	4 5/32	4.2 No8	31 1.1	10

The cleat flips up to release the rope when a set load is exceeded. The CL257 is easily re-set or adjusted for different release loads, even out on the water.

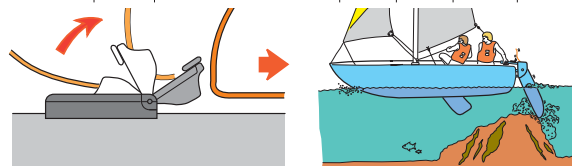


Roller Cleats

	Sea-Dog Part #		mm Ø inch Ø	A B C			mm Ø inch Ø	mm Ø Gauge	Gms Ozs	Standard pack
	Bulk	Display		A	B	C				
Roller Fairlead White Junior CL203W/S1 (Nylon)	002035	—	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 11/16	M4 #8	4.2 No8	17 0.6	n/a
White Junior with Roller CL203W/S2 (Nylon)	002036	—	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 11/16	M4 #8	4.2 No8	17 0.6	n/a
Racing Junior Mk1 with Roller CL230 CL230AN (Aluminum)	002300 002305	002300-1 002305-1	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 11/16	M5 #10	4.8 No10	35 1.2	10
Roller Fairlead Mk1 Racing Junior CL236 CL236AN (Aluminum)	002360 002365	002360-1 002365-1	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 11/16	M5 #10	4.8 No10	40 1.4	10
Trapeze and Vang Cleat CL253 CL253AN (Aluminum)	002530 002535	002530-1 002535-1	4 - 8 5/32-5/16	89 3 1/2	70 2 3/4	18 11/16	— —	— —	46 1.6	10

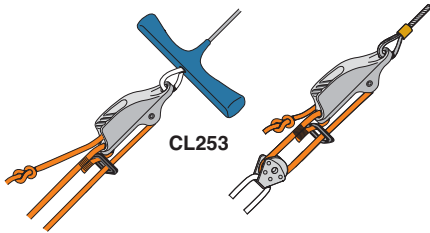

The CL253/CL253AN are designed for trapeze adjustment and vang tensioning.




The CL230/CL230AN are ideal for through-deck or mast applications.



Q-Lok


	Sea-Dog Part #		mm Ø inch Ø	A B C			mm Ø inch Ø	mm Ø Gauge	Gms Ozs	Standard pack
	Bulk	Display		A	B	C				
Q-Lok CL5001 (Stainless steel)	005000	005000-1	3 - 4 1/8-5/32	33 1 5/16	—	20 3/4	—	—	5 0.2	10

Quickly adjust ropes to a variety of fixed positions

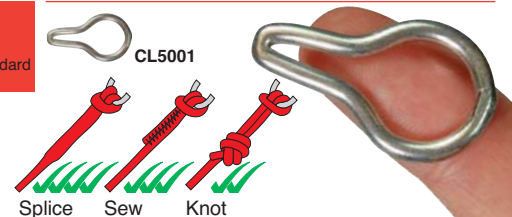


Cub & Sail Line Cleats

	Sea-Dog Part #		mm Ø inch Ø	A B C			mm Ø inch Ø	mm Ø Gauge	Gms Ozs	Standard pack
	Bulk	Display		A	B	C				
Cub Cleat CL232 CL232W (Nylon)	002320 002323	002320-1 —	3 - 6 1/8-1/4	35 1 3/8	35 1 3/8	36 1 7/16	M4 #8	4.2 No8	13 0.5	10
Racing Sail Line Cleat (Port) CL241 CL241AN (Aluminum)	002410 002415	002410-1 002415-1	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 13/16	M4 #8	4.2 No8	16 0.6	10
Racing Sail Line Cleat (Starboard) CL273 CL273AN (Aluminum)	002730 002735	002730-1 002735-1	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 13/16	M4 #8	4.2 No8	16 0.6	10



The CL232 can be fitted either way up. Minimum movement cleats the rope.





The CL241 and CL273 have a smooth low profile for snag free areas.



The AN suffix indicates an extra superior Hard Anodized finish.

Omega Cleat

	Sea-Dog Part #		mm Ø inch Ø	A B C			mm Ø inch Ø	mm Ø Gauge	Gms Ozs	Standard pack
	Bulk	Display		A	B	C				
Omega Cleat CL255 CL255AN (Aluminum)	002550 002555	002550-1 002555-1	3 - 6 1/8-1/4	46 1 13/16	27 1 1/16	43 1 11/16	M4 #8	4.2 No8	28 1.0	10

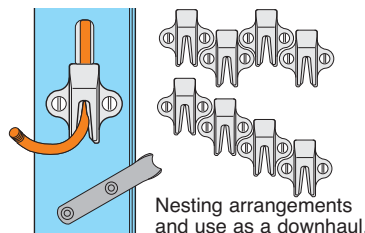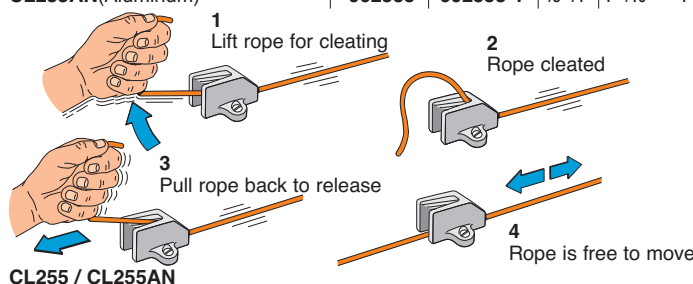




Cleats & Chocks

Cleats with integral fairleads for ropes to 5/32"

	Sea-Dog Part #		mm Ø inch Ø	mm inch			mm Ø inch Ø	mm Ø Gauge	Gms Ozs	Standard pack
	Bulk	Display		A	B	C				
Micros										
CL263	002630	002630-1	1 - 4	44	24	13	M3	3.0	4.8	10
CL263W (Nylon)	327263	327263-1	3/64-5/32	13/4	15/16	1/2	#4	No4	0.2	
Racing Micros										
CL268	002680	002680-1	1 - 4	44	24	13	M3	3.0	13	10
CL268AN (Aluminum)	002685	002685-1	3/64-5/32	13/4	15/16	1/2	#4	No4	0.5	
Racing Micros with Becket										
CL270	002700	002700-1	1 - 4	44	24	13	M3	3.0	14	10
CL270AN (Aluminum)	002705	002705-1	3/64-5/32	13/4	15/16	1/2	#4	No4	0.5	
Racing Micros Side entry (Starboard) with Becket CL277										
CL277AN (Aluminum)	002770	002770-1	1 - 4	44	24	14	M3	3.0	12	10
CL277AN (Aluminum)	002775	002775-1	3/64-5/32	13/4	15/16	9/16	#4	No4	0.4	
Racing Micros Side entry (Port) with Becket CL278										
CL278AN (Aluminum)	002780	002780-1	1 - 4	44	24	14	M3	3.0	12	10
CL278AN (Aluminum)	002785	002785-1	3/64-5/32	13/4	15/16	9/16	#4	No4	0.4	
Tapered Pad for all Micros cleats										
CL823 (Polypropylene)	008230	008230-1	—	47	—	19	—	—	4	10
				1 13/16	—	3/4			0.15	



Rigging for CL270, CL270AN, CL277, CL277AN, CL278 and CL278AN.

Riveting the CL211 Mk2 or CL263. Rivet gun spacers are available free of charge. Special long mandrel alloy rivets are also available for CL211 Mk2.



The AN suffix indicates an extra superior Hard Anodized finish.



Cleats with integral fairleads for ropes to 1/4"

	Sea-Dog Part #		mm Ø inch Ø	mm inch			mm Ø inch Ø	mm Ø Gauge	Gms Ozs	Standard pack
	Bulk	Display		A	B	C				
Racing Junior Mk2										
CL211Mk2	002112	002112-1	3 - 6	55	27	17	M4	4.2	23	10
CL211Mk2 AN (Aluminum)	002116	002116-1	1/8-1/4	2 1/8	1 1/16	5/8	#8	No8	0.8	
Racing Junior Mk2 with Becket										
CL211Mk2/S2	002117	002117-1	3 - 6	55	27	17	M4	4.2	23	10
CL211Mk2AN/S2 (Aluminum)	002118	002118-1	1/8-1/4	2 1/8	1 1/16	5/8	#8	No8	0.8	
Mk2 Nylon Junior										
CL272	002720	002720-1	3 - 6	55	27	17	M4	4.2	10	0.35
CL272W	002723	002723-1	1/8-1/4	2 1/8	1 1/16	5/8	#8	No8	0.35	10



CKC Cleats & Accessories CL815, CL817 & CL819

	Sea-Dog Part #		mm Ø inch Ø	mm Ø inch Ø	mm Ø Gauge	mm Ø Gauge	Gms Ozs	Standard pack
	Bulk	Display						
Keeper for 002112, 002116 & 002117								
CL815 (Acetal)	008150	008150-1	4 5/32	M4 #8	4.2 No8	4.2 No8	9 0.3	10
Cage for 002112 & 002116								
requires CL815	008170	008170-1	—	—	—	—	23 0.8	10
CL817 (Nylon & Stainless steel)								
Tapered Pad for 002112, 002116, 002117, 002172 & 002182								
CL819 (Polypropylene)	008190	008190-1	4 5/32	M4 #8	4.2 No8	4.2 No8	8 0.3	10
CKC Cleat CL211Mk2 X 2								
CL825CKC	008250	008250-1	5 3/16	M5 #10	4.8 No10	4.8 No10	150 5.3	10
CL825CKCAN	008255	008255-1						
CKC Cleat CL211Mk2								
CL830CKC	008300	008300-1	4 5/32	M4 #8	4.2 No8	4.2 No8	58 2.0	10
CL830CKCAN	008305	008305-1						
CKC Cleat CL211Mk2								
CL832CKC	008320	008320-1	4 5/32	M4 #8	4.2 No8	4.2 No8	51 1.8	10
CL832CKCAN	008325	008325-1						



Cages CL816 and CL817 with wear resistant stainless steel allow easy cleating at extreme angles.

Rope runs free
Keeper is closed to stop rope going into cleat teeth.

Pull rope back and down to cleat
Keeper opens to allow rope into teeth.

Rope gripped
Keeper holds rope in cleat.

Lift up to release
Keeper opens to allow rope out of teeth.

Rope runs free again.


Accessories
CL814, CL816 & CL818

Keeper for 002030, 002111, 002115, 002171, 002181, 002360 & 002365
CL814 (Acetal)
Cage for 002030, 002111, 002115, 002360 & 002365 requires CL814
CL816 (Nylon & Stainless steel)
Tapered Pad for 002030, 002111, 002115, 002171, 002181, 002360, 002365, 007040 & 007045
CL818 (Polypropylene)
CK Cleat CL211Mk1+CL814+CL816
CL833CKC
CL833CKCAN

Sea-Dog Part #									
Bulk	Display	mm Ø inch Ø	mm Ø inch Ø	mm Ø Gauge	mm Ø Gauge	Gms Ozs	Standard pack		
008140	008140-1	4.8 3/16	M5 #10	4.8 No10	4.8 No10	11 0.4	10		
008160	008160-1	—	—	—	—	30 1.1	10		
008180	008180-1	4.8 3/16	M5 #10	4.8 No10	4.8 No10	14 0.5	10		
008330	008330-1	4.8 3/16	M5 #10	4.8 No10	4.8 No10	76 2.7	10		
008335	008335-1	4.8 3/16	M5 #10	4.8 No10	4.8 No10	76 2.7	10		



Rope runs free -
Keeper keeps rope
out of teeth



Pull rope down to
cleat. Sloping rear
automatically guides
rope into teeth



Rope held securely,
even if cleat is
mounted under a
surface.

Tapered Pad allows correct
rope/cleat alignment.



The Keeper, CL814, holds rope in teeth
under no load or when mounted upside
down. More details on using these
accessories can be found on our website.

Backplate provides under
deck support and is
supplied with every tapered
pad.


Cleats with integral
fairleads for ropes to 1/4"

Junior
CL203 (Nylon)
Racing Junior Mk1
CL211Mk1
CL211Mk1AN (Aluminum)
Boom Cleat
CL702
CL702AN (Aluminum)
Racing Junior with Becket
CL704
CL704AN (Aluminum)


Sea-Dog Part #									
Bulk	Display	mm Ø inch Ø	A	B	C	mm Ø inch Ø	mm Ø Gauge	Gms Ozs	Standard pack
002030	002030-1	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 11/16	M4 #8	4.2 No8	17 0.6	10
002111	002111-1	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 11/16	M5 #10	4.8 No10	34 1.2	10
002115	002115-1	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 11/16	M5 #10	4.8 No10	34 1.2	10
007020	007020-1	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 11/16	M5 #10	4.8 No10	36 1.3	10
007025	007025-1	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 11/16	M5 #10	4.8 No10	36 1.3	10
007040	007040-1	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 11/16	M5 #10	4.8 No10	34 1.2	10
007045	007045-1	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 11/16	M5 #10	4.8 No10	34 1.2	10

CL702

The CL702 has a specially
curved base for use on tubes.




CL704

Side entry Cleats Mk1
for ropes to 1/4"

Side entry (Starboard)
CL217Mk1
CL217Mk1AN (Aluminum)
Side entry (Port)
CL218Mk1
CL218Mk1AN (Aluminum)

Sea-Dog Part #									
Bulk	Display	mm Ø inch Ø	A	B	C	mm Ø inch Ø	mm Ø Gauge	Gms Ozs	Standard pack
002171	002171-1	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 11/16	M5 #10	4.8 No10	30 1.1	10
002175	002175-1	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 11/16	M5 #10	4.8 No10	30 1.1	10
002181	002181-1	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 11/16	M5 #10	4.8 No10	30 1.1	10
002185	002185-1	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 11/16	M5 #10	4.8 No10	30 1.1	10

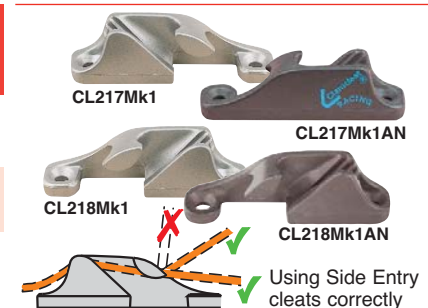

Using Side Entry
cleats correctly

Side entry Cleats Mk2
for ropes to 1/4"

Side entry (Starboard)
CL217Mk2
CL217Mk2AN (Aluminum)
Side entry (Port)
CL218Mk2
CL218Mk2AN (Aluminum)

Sea-Dog Part #									
Bulk	Display	mm Ø inch Ø	A	B	C	mm Ø inch Ø	mm Ø Gauge	Gms Ozs	Standard pack
002172	002172-1	3 - 6 1/8-1/4	55 2 1/8	27 1 1/16	17 11/16	M4 #8	4.2 No8	24 0.8	10
002176	002176-1	3 - 6 1/8-1/4	55 2 1/8	27 1 1/16	17 11/16	M4 #8	4.2 No8	24 0.8	10
002182	002182-1	3 - 6 1/8-1/4	55 2 1/8	27 1 1/16	17 11/16	M4 #8	4.2 No8	24 0.8	10
002186	002186-1	3 - 6 1/8-1/4	55 2 1/8	27 1 1/16	17 11/16	M4 #8	4.2 No8	24 0.8	10




Using Side Entry
cleats correctly



Cleats & Chocks

Cleats for Riggering on a Rope

	Sea-Dog Part #		mm Ø inch Ø	mm inch			Gms Ozs	Standard pack
	Bulk	Display		A	B	C		
Loop Cleat								
CL223	002230	002230-1	3 - 6	52	—	18	18	
CL223W (Nylon)	327223	327223-1	1/8-1/4	2 1/16	—	1 1/16	0.7	10
Racing JuniorMk1 with Roller								
CL230	002300	002300-1	3 - 6	82	66	18	35	
CL230AN (Aluminum)	002305	002305-1	1/8-1/4	3 1/4	2 5/8	1 1/16	1.2	10
Fender/Large Loop Cleat								
CL234	002340	002340-1	6 - 12	78	—	24	45	
CL234W (Nylon)	327234	327234-1	1/4-1/2	3 1/16	—	1 9/16	1.6	10
Trapeze and Vang Cleat								
CL253	002530	002530-1	4 - 8	89	70	18	46	
CL253AN (Aluminum)	002535	002535-1	5/32-5/16	3 1/2	2 3/4	1 1/16	1.6	5
Cobra Cleat								
CL264	002640	002640-1	4 - 6	120	—	23	47	
CL264AN (Aluminum)	002645	002645-1	3/16-1/4	4 23/32	—	2 9/32	1.7	1
Jiffy Tie								
CL806 (Polypropylene)	008060	—	4	42	—	21	4	n/a
			3/16	1 3/4	—	7/8	0.1	

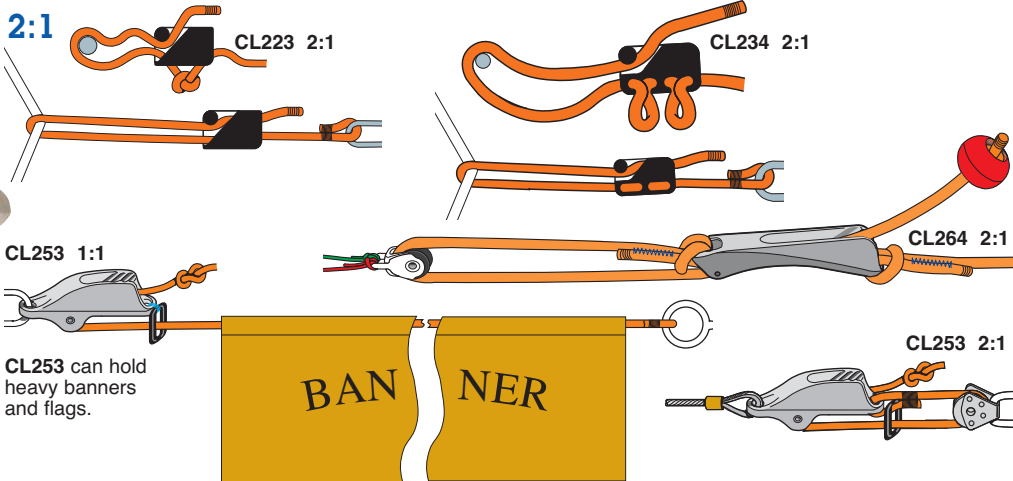


The AN suffix indicates an extra superior Hard Anodized finish.



Line-Lok® Cleats for Riggering on a Rope

	Sea-Dog Part #		mm Ø inch Ø	mm inch			Gms Ozs	Standard pack
	Bulk	Display		A	B	C		
Line-Lok®								
CL260	002600	002600-1	2 - 5	31	—	10	2.0	
CL260W (Nylon)	002603	002603-1	1/16-3/16	1 1/4	—	3/8	0.07	10
Mini Line-Lok®								
CL266	002660	002660-1	1 - 3	21	—	7	0.74	
CL266W (Nylon)	002663	002663-1	3/64-1/8	13/16	—	1/4	0.03	10
Large Line-Lok®								
CL271	002710	002710-1	4 - 8	67	—	23	27	
CL271W (Nylon)	002713	002713-1	5/32-5/16	2 5/8	—	7/8	0.95	10
Medium Line-Lok®								
CL276	002760	002760-1	3 - 6	47	—	17	9.4	
CL276W (Nylon)	002763	002763-1	1/8-1/4	1 7/8	—	5/8	0.33	10

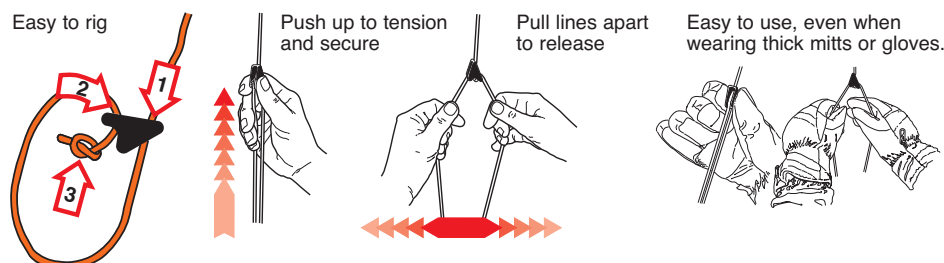

These Line Tensioners lock lines securely and are easy to release.

- Grips the line to resist being shaken loose - even in extreme conditions.
- Out performs all existing plastic guy runners.
- See www.linelok.com

Aero Cleats CL826

	Sea-Dog Part #		mm Ø inch Ø	A B C			mm inch	Gms Ozs	Standard pack
	Bulk	Display		A	B	C			
Aero base + CL211Mk2 Racing Junior			4 - 6	73	—	16	35		
CL826-11 (Nylon & Aluminum)	008261	008261-1	3/16-1/4	27/8	—	5/8	1.2		10
Aero base + CL211Mk2AN Hard Anodized Racing Junior			4 - 6	73	—	16	35		
CL826-11AN (Nylon & Aluminum)	008265	008265-1	3/16-1/4	27/8	—	5/8	1.2		10
Aero base + CL217Mk2 Nylon Junior			4 - 6	73	—	16	23		
CL826-72 (Nylon)	008263	008263-1	3/16-1/4	27/8	—	5/8	0.8		10




Easy to rig and adjust by hand.



Aero Cleats CL827

	Sea-Dog Part #		mm Ø inch Ø	A B C			mm inch	Gms Ozs	Standard pack
	Bulk	Display		A	B	C			
Aero base + CL203 Nylon Junior			4 - 6	112	—	19	43		
CL827-03 (Nylon)	008277	—	3/16-1/4	43/8	—	3/4	1.5		10
Aero base + CL211Mk1 Racing Junior			4 - 6	112	—	19	62		
CL827-11 (Nylon & Aluminum)	008271	—	3/16-1/4	43/8	—	3/4	2.2		10
Aero base + CL211Mk1 Hard Anodized Racing Junior			4 - 6	112	—	19	62		
CL827-11AN (Nylon & Aluminum)	008272	008272-1	3/16-1/4	43/8	—	3/4	2.2		10
Aero base + CL217Mk1 Side entry Racing Junior (Starboard)			4 - 6	112	—	19	59		
CL827-17 (Nylon & Aluminum)	008273	—	3/16-1/4	43/8	—	3/4	2.1		10
Aero base + CL217 Mk1 Hard Anodized Side entry Racing Junior (Starboard)			4 - 6	112	—	19	59		
CL827-17AN (Nylon & Aluminum)	008274	—	3/16-1/4	43/8	—	3/4	2.1		10
Aero base + CL218Mk1 Side entry Racing Junior (Port)			4 - 6	112	—	19	59		
CL827-18 (Nylon & Aluminum)	008275	—	3/16-1/4	43/8	—	3/4	2.1		10
Aero base + CL218 Mk1 Hard Anodized Side entry Racing Junior (Port)			4 - 6	112	—	19	59		
CL827-18AN (Nylon & Aluminum)	008276	—	3/16-1/4	43/8	—	3/4	2.1		10
Aero base + CL236 Roller Fairlead Racing Junior			4 - 6	112	—	19	69		
CL827-36 (Nylon & Aluminum)	008278	—	3/16-1/4	43/8	—	3/4	2.4		10
Aero base + CL236 Hard Anodized Roller Fairlead Racing Junior			4 - 6	112	—	19	69		
CL827-36AN (Nylon & Aluminum)	008279	—	3/16-1/4	43/8	—	3/4	2.4		10

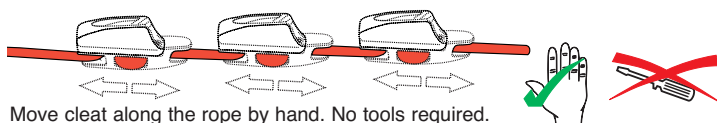

Move cleat along the rope by hand. No tools required.




Side entry fairlead aids quick rigging and unrigging.


Use CL827-36, with roller fairlead, where rope forms a triangle.

Aero Cleats CL828

	Sea-Dog Part #		mm Ø inch Ø	A B C			mm inch	Gms Ozs	Standard pack
	Bulk	Display		A	B	C			
Aero base + CL263 Nylon Micros			3 - 4	60	—	13	15		
CL828-63 (Nylon)	008287	—	1/8-5/32	23/8	—	1/2	0.5		10
Aero base + CL268 Racing Micros			3 - 4	60	—	13	21		
CL828-68 (Nylon & Aluminum)	008281	008281-1	1/8-5/32	23/8	—	1/2	0.75		10
Aero base + CL268 Hard Anodized Racing Micros			3 - 4	60	—	13	21		
CL828-68AN (Nylon & Aluminum)	008282	008282-1	1/8-5/32	23/8	—	1/2	0.75		10
Aero base + CL270 Racing Micros with Becket			3 - 4	60	—	13	24		
CL828-70 (Nylon & Aluminum)	008288	—	1/8-5/32	23/8	—	1/2	0.85		10
Aero base + CL270 Hard Anodized Racing Micros with Becket			3 - 4	60	—	13	24		
CL828-70AN (Nylon & Aluminum)	008289	—	1/8-5/32	23/8	—	1/2	0.85		10
Aero base + CL277 Side entry Racing Micros (Starboard)			3 - 4	60	—	13	23		
CL828-77 (Nylon & Aluminum)	008283	—	1/8-5/32	23/8	—	1/2	0.8		10
Aero base + CL77 Hard Anodized Side entry Racing Micros (Starboard)			3 - 4	60	—	13	23		
CL828-77AN (Nylon & Aluminum)	008284	—	1/8-5/32	23/8	—	1/2	0.8		10

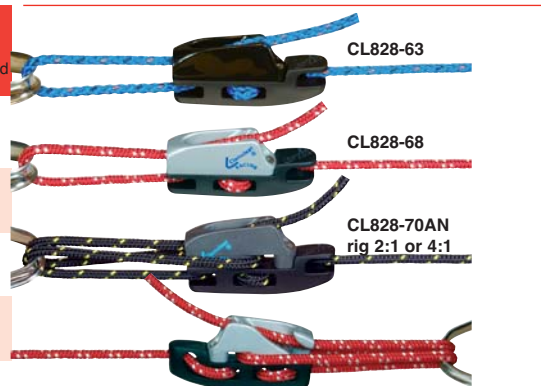

CL828-77 can be rigged 2:1 or 4:1.

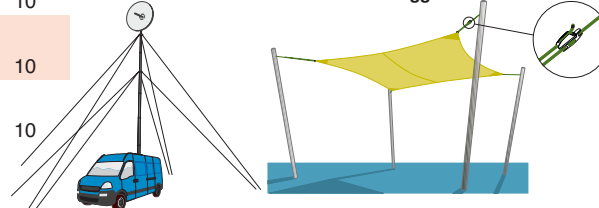



Cleats & Chocks

Kitesurfing Cleats


Racing Junior Mk2
CL211Mk2AN (Aluminum)
Trapeze and Vang Cleat
CL253 (Aluminum)
CL253AN (Aluminum)
Cobra Cleat
CL264 (Aluminum)
CL264AN (Aluminum)
Bar Cleat
CL265 (Aluminum + S/Steel)
CL265AN (Aluminum + S/Steel)

Sea-Dog Part #		mm Ø inch Ø	A B C			mm inch	Gms Ozs	Standard pack
Bulk	Display		A	B	C			
002116	002116-1	3 - 6 1/8-1/4	55 2 1/8	27 1 1/16	17 5/8	23 0.8	1	
002530	002530-1	4 - 8 5/32-5/16	89 3 1/2	70 2 3/4	18 11/16	46 1.6	1	
002640	002640-1	4 - 6 3/16-1/4	120 4 23/32	—	23 29/32	47 1.7	1	
002650	002650-1	4 - 8 5/32-5/16	63 2 1/2	—	18 11/16	60 2.1	1	

The AN suffix indicates an extra superior Hard Anodized finish.

The ultimate kite surfing rig for complete control, uses the CL265 Bar cleat and the in-line CL264 Cobra cleat.

Bar diameter 1"-1 3/16" Ø (25 - 31 mm)

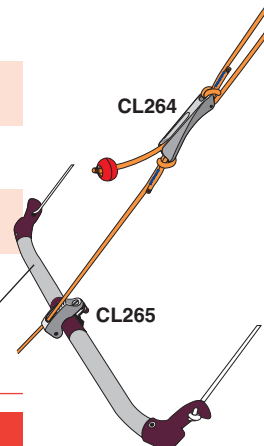


Power Grip Cleats

Power Grip 1
CL261 (Aluminum)
Power Grip 2
CL262 (Aluminum)

Sea-Dog Part #		mm Ø inch Ø	A B C			mm inch	Gms Ozs	Standard pack
Bulk	Display		A	B	C			
002610	002610-1	3 - 6 1/8-1/4	95 3 3/4	—	17 11/16	52 1.9	10	
002620	002620-1	3 - 6 1/8-1/4	189 7 7/16	—	17 11/16	70 2.5	10	



The CL261 Power Grip 1 for single handed use, allows you to pull twice the load.



Use the CL262 Power Grip 2 where even more pulling power and control is required. It is light, strong and easy to carry in your pocket.




No more sore hands!


Windsurfing Cleats

Compact
Twin Sheave Cleat
CL247 (Aluminum)
Cleat with Hook
and 3 Sheaves
CL248 (Aluminum)
The Gap Closer
CL250 (Aluminum)
Trapeze and Vang Cleat
CL253 (Aluminum)
Rivet-on Fitting
for 6:1 Ratio
CL708 (Aluminum)
Boom Cleat
and Clamp
CL244 (Aluminum + Nylon)


Sea-Dog Part #		mm Ø inch Ø	A B C			mm inch	mm Ø inch Ø	mm Ø Gauge	Gms Ozs	Standard pack
Bulk	Display		A	B	C					
002470	002470-1	3 - 6 1/8-1/4	53 2 1/16	31 1 1/4	40 1 9/16	M5 #10	4.8 No10	40 1.4	5	
002480	002480-1	3 - 5 1/8-3/16	69 2 3/4	—	40 1 9/16	—	—	52 1.8	5	
002500	002500-1	3 - 5 1/8-3/16	84 3 1/4	11+29 9/16+1 1/8	48 1 1/2	M5 #10	4.8 No10	43 1.6	5	
002530	002530-1	4 - 8 5/32-5/16	89 3 1/2	70 2 3/4	18 1 1/16	—	—	46 1.6	5	
007080	007080-1	3 - 5 1/8-3/16	84 3 1/4	11+29 9/16+1 1/8	36 1 1/2	M5 #10	4.8 No10	32 1.1	5	
—	002440-1	3 - 6 1/8-1/4	58 2 1/4	—	—	—	—	4.2 No8	32 1.1	5



Adjustable Outhaul




CL250 6:1











CL248 + CL708 6:1

Insert Cleats	Sea-Dog Part #			mm Ø inch Ø	A	B	mm inch	C		Gms Ozs	Standard pack
	Bulk	Display									
Nylon Insert Cleat with Fairlead CL243/L	002435	—		3 - 6 1/8-1/4	42 1 11/16	—	22 7/8	10 0.4		10	n/a
Aluminum Insert Cleat with Fairlead CL244/L	002445	—		3 - 6 1/8-1/4	42 1 5/8	—	22 7/8	18 0.6		18	n/a
Twin Insert Cleat CL710 (Aluminum)	007100	—		3 - 6 1/8-1/4	48 1 7/8	—	13 1/2	18 0.6		18	n/a
Small Insert Cleat CL712 (Aluminum)	007120	—		3 - 5 1/8-3/16	28 1 1/8	—	11 7/16	7 0.2		7	n/a
Insert Cleat CL715 (Aluminum)	007150	—		3 - 5 1/8-3/16	9 3/8	—	12 7/16	3 0.1		3	n/a
Very Small Insert Cleat CL716 (Aluminum)	007160	—		3 - 4 1/8-5/32	24 1 5/16	—	11 7/16	4 0.11		4	n/a

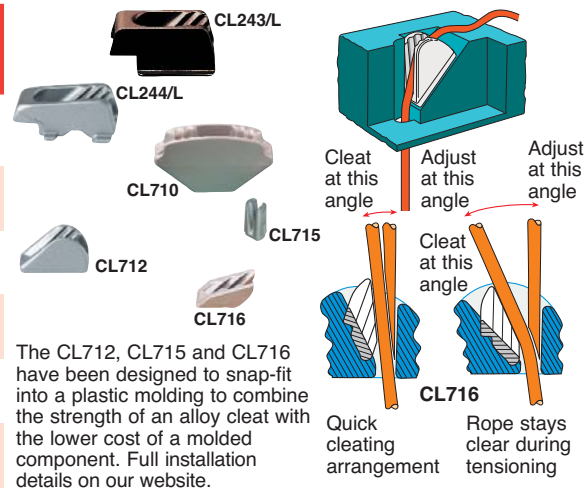


Sail Cleats	Sea-Dog Part #			mm Ø inch Ø	A	B	mm inch	C		Gms Ozs	Standard pack
	Bulk	Display									
Leech Line Cleat CL212 (Nylon)	002120	002120-1		2 - 5 1/16-3/16	70 2 3/4	49 1 15/16	21 1 13/16	4 5/32		9 0.3	10
Shield for CL212 CL212A (Nylon)	002125	—		—	71 2 3/4	49 1 15/16	29 1 1/8	4 5/32		4 0.1	10
Backplate for CL212 CL212BP (Nylon)	002120P	—		—	70 2 3/4	49 1 15/16	21 1 13/16	—		2 0.08	10
Backplate Black for CL241AN, CL258AN, CL259AN & CL273AN CL212BP-B (Nylon)	002120BP	—		—	70 2 3/4	49 1 15/16	21 1 13/16	—		2 0.08	10
Fine Line Cleat (Starboard) CL214W (Nylon)	002143	—		2 - 5 1/16-3/16	70 2 3/4	49 1 15/16	21 1 13/16	4 5/32		9 0.3	10
Dinghy Leech Line Cleat CL221 (Nylon)	002210	—		0 - 3 0-1/8	43 1 3/4	33 1 3/16	17 1 1/16	3 1/8		4 0.1	10
Sail Line Cleat CL233 (Nylon)	002330	—		2 - 6 1/16-1/4	57 2 1/4	—	34 1 3/8	—		8 0.3	10
Backplate CL233BP (Nylon) for CL233 Racing Sail Line Cleat (Starboard) CL241	002330BP	—		—	57 2 1/4	—	34 1 3/8	—		2 0.08	10
CL241AN (Aluminum)	002410	—		3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 13/16	4 5/32		16 0.6	10
Racing Fine Line (Starboard) CL258	002580	—		3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 13/16	4 5/32		19 0.7	10
CL258AN (Aluminum)	002585	—		3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 13/16	4 5/32		19 0.7	10
Racing Fine Line (Port) CL259	002590	—		3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 13/16	4 5/32		19 0.7	10
CL259AN (Aluminum)	002595	—		3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 13/16	4 5/32		19 0.7	10
Sail Edge Cleat CL267 (Nylon + Aluminum)	002670	—		2 - 4 1/16-5/32	50 2	—	37 1 7/16	4 5/32		12 0.42	10
Sail Edge Cleat CL269 (Nylon)	002690	—		2 - 4 1/16-5/32	50 2	—	37 1 7/16	4 5/32		10 0.35	10
Racing Sail Line Cleat (Port) CL273	002730	—		3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 13/16	4 5/32		16 0.6	10
CL273AN (Aluminum)	002735	—		3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 13/16	4 5/32		16 0.6	10



Most cleats are
available with or
without backplates
and rivets.

The CL212A shield
prevents the CL212
and CL258 snagging
in shrouds or other
parts of the rigging.






Cleats & Chocks

Cleats for ropes to 5/32"

	Sea-Dog Part #		mm Ø inch Ø	mm inch			mm Ø inch Ø	mm Ø Gauge	Gms Ozs	Standard pack
	Bulk	Display		A	B	C				
Midi CL209 (Nylon)	002090	002090-1	4 - 8 5/32-5/16	73 27/8	55 2 1/8	19 3/4	M5 #10	4.8 No10	20 0.7	10
Side-fixing Midi CL215 (Nylon)	002150	002150-1	4 - 8 5/32-5/16	38 1 1/2	27 1 1/8	43 1 11/16	M5 #10	4.8 No10	14 0.5	10
Midi with integral Fairlead CL231 (Nylon)	002310	002310-1	4 - 8 5/32-5/16	88 3 7/16	55 2 1/8	22 7/8	M5 #10	4.8 No10	30 1.1	10
Racing Midi CL254	002540	002540-1	4 - 8 5/32-5/16	73 27/8	55 2 1/8	19 3/4	M5 #10	4.8 No10	38 1.3	10
CL254AN (Aluminum)	002545	002545-1	4 - 8 5/32-5/16	73 27/8	55 2 1/8	19 3/4	M5 #10	4.8 No10	38 1.3	10
Tapered Pad for CL209, CL254 & CL254AN CL803 (Polypropylene)	008030	—	—	79 3 1/8	—	24 15/16	M5 #10	4.8 No10	8 0.3	10

Tapered pads aid optimum rope alignment, especially when a fairlead would not be appropriate.

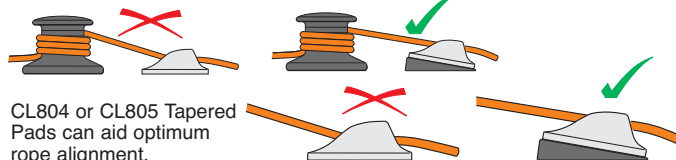


CL804 or CL805 Tapered Pads can aid optimum rope alignment.



Cleats for ropes to 3/8"

	Sea-Dog Part #		mm Ø inch Ø	mm inch			mm Ø inch Ø	mm Ø Gauge	Gms Ozs	Standard pack
	Bulk	Display		A	B	C				
Horizontal CL202 (Nylon)	002020	002020-1	6 - 10 1/4-3/8	74 2 5/16	51 2	79 3 1/8	M6 1/4	6.3 No14	64 2.3	10
Lateral (Starboard) CL206 (Nylon)	002060	002060-1	6 - 10 1/4-3/8	75 3	51 2	49 1 5/16	M6 1/4	6.3 No14	35 1.3	10
Lateral (Port) CL207 (Nylon)	002070	002070-1	6 - 10 1/4-3/8	75 3	51 2	49 1 5/16	M6 1/4	6.3 No14	35 1.3	10



One of the first non-marine uses for Clamcleat® rope cleats was to tension and secure safety slings used by electricity and telephone engineers when working up ladders leaning against poles.



Cleats for ropes to 1/2"

	Sea-Dog Part #		mm Ø inch Ø	mm inch			mm Ø inch Ø	mm Ø Gauge	Gms Ozs	Standard pack
	Bulk	Display		A	B	C				
Vertical CL201 (Nylon)	002010	002010-1	6 - 12 1/4-1/2	95 3 3/4	72 2 13/16	28 1 1/8	M6 1/4	6 No14	43 1.5	10
Racing Vertical CL219	002190	002190-1	6 - 12 1/4-1/2	90 3 9/16	72 2 13/16	27 1 1/16	M6 1/4	6.3 No14	70 2.5	1
CL219AN (Aluminum)	002195	002195-1	6 - 12 1/4-1/2	90 3 9/16	72 2 13/16	27 1 1/16	M6 1/4	6.3 No14	70 2.5	1
Uncoated Racing Vertical CL219VB (Aluminum)	002190NC	—	6 - 12 1/4-1/2	90 3 9/16	72 2 13/16	27 1 1/16	M6 1/4	6.3 No14	70 2.5	1
Vertical with Integral Fairlead CL228 (Nylon)	002280	002280-1	6 - 12 1/4-1/2	114 4 1/2	72 2 13/16	30 1 3/16	M6 1/4	6.3 No14	68 2.4	1
Tapered Pad for CL201, CL219, CL219AN, CL237 & CL238 CL804 (Polypropylene)	008040	—	—	103 4 1/16	—	34 1 3/8	M6 1/4	6.3 No14	18 0.6	10

The AN suffix indicates an extra superior Hard Anodized finish.

Our aluminum cleats are easily welded to provide a strong and permanent fixing. Where an alloy cleat needs to be fixed to an aluminum surface welding can be less expensive than drilling holes and bolting on a cleat. Applications include aluminum fishing boats and oil rigs.




Trucker Hitch Cleat

Trucker Hitch Cleat
CL719 (Nylon)

An aerial cleat that rigs like the trucker's hitch / wagoner's hitch.



Rig like this.

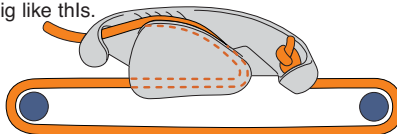

Sea-Dog Part

Bulk

Display

mm
inchGms
OzsStandard
packmm Ø
inch Ø

A

B

C

mm Ø
inch Ø

A

B

C

mm Ø
inch ØGms
OzsStandard
pack

007190

-

5 - 7
3/16-1/4139
5 1/2

-

28
1 1/873
2.6

1



CL719

Easy to use, can be fastened and released with one hand and operated from a distance.

Uses a single piece of rope.

Uses include aiding installation of machinery and heavy duty cables.

Spring-gate Cleats
for ropes to 1/2"Vertical with Spring-gate
CL237 (Nylon)

002370

002370-1

6 - 12
1/4-1/295
3 3/472
2 13/1640
1 5/8M6
1/46.3
No1447
1.7

1




Racing Vertical with Spring-gate
CL238 (Aluminum)

002380

002380-1

6 - 12
1/4-1/290
3 9/1672
2 13/1640
1 5/8M6
1/46.3
No1475
2.6

1



The red gate is flipped up by hand to keep the rope out of the cleat.



CL237



CL238

Spring-gate Cleats
for ropes to 5/8"Major with Spring-gate
CL239 (Nylon)

002390

002390-1

10 - 16
3/8-5/8122
4 13/1695
3 3/449
2M8
5/1688
3.2

1

Racing Major with Spring-gate
CL240 (Aluminum)

002400

002400-1

10 - 16
3/8-5/8118
4 5/895
3 3/450
2M8
5/16166
5.9

1



CL239

CL240

Cleats
for ropes to 5/8"Major
CL205 (Nylon)

002050

002050-1

10 - 16
3/8-5/8122
4 13/1695
3 3/436
1 7/16M8
5/1685
3.0

5

Racing Major
CL220 (Aluminum)

002200

002200-1

12 - 16
1/2-5/8118
4 5/895
3 3/437
1 1/2M8
5/16163
5.7

1

Uncoated Racing Major
CL220 (Aluminum)

002200NC

-

12 - 16
1/2-5/8118
4 5/895
3 3/437
1 1/2M8
5/16163
5.7

1

Fairlead for CL205, CL220, CL239
& CL240

CL2245 (Stainless Steel)

002245

002245-1

50
1 31/32

-

41
1 5/8M8
5/1672
2.5

1

Tapered Pad
CL805 (Polypropylene)

008050

008050-1

131
5 1/8

-

45
1 3/4M8
5/1635
1.2

5



CL2245



CL205 + CL2245

CL220 + CL2245



CL205



CL220



CL220VB



CL805

CL220VB



The CL220VB and CL219VB, with uncoated finish, can be welded to an aluminum substrate.